


951D SERIES 12mm dia. SPUR SUB MINIATURE GEARED MOTOR

(951D MOTOR)

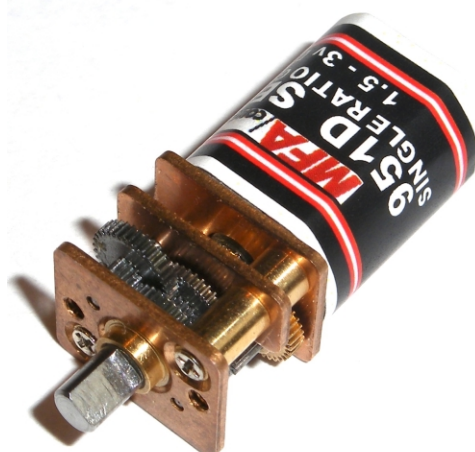

IMPORTANT NOTICE
Due to the wide range of applications for this product it is the users responsibility to establish the products suitability for their individual purpose(s).

RATIOS NOW AVAILABLE AS EX-STOCK ITEMS.

951D101	(1.5v - 3v)	WITH 951D MOTOR.	RATIO 10:1	951D101/6V (6V) WITH 951D 6V MOTOR	RATIO 10:1
951D601	(1.5v - 3v)	WITH 951D MOTOR.	RATIO 60:1	951D601/6V (6V) WITH 951D 6V MOTOR	RATIO 60:1
951D1021	(1.5v - 3v)	WITH 951D MOTOR.	RATIO 102:1	951D1021/6V (6V) WITH 951D 6V MOTOR	RATIO 102:1
951D2981	(1.5v - 3v)	WITH 951D MOTOR.	RATIO 298:1	951D2981/6V (6V) WITH 951D 6V MOTOR	RATIO 298:1

All metal spur geared motor for sub miniature applications. The combination of a high quality three pole motor with precious metal brushes, mounted onto a rugged all metal gearbox ensure a reliable service life.

MOTOR DATA. (RE-951D)

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY						STALL TORQUE	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE		OUTPUT	EFF	TORQUE	
			R.P.M.	A	R.P.M.	A	oz - in	g - cm	W	%	oz - in	g - cm
951D	1.5 - 3.0	3v CONSTANT	16000	0.1	13500	0.32		4.0	0.58	60		EST 20
951D	6V	6v CONSTANT	18000	0.65	15000	0.13		3.8	0.61	78		EST 20

REDUCTION TABLE. R.P.M. (NO LOAD)

SUPPLY VOLTAGE	1.5v	3.0v
951D101	800	1600
951D601	133	267
951D1021	78	157
951D2981	27	54

REDUCTION TABLE. R.P.M. (NO LOAD)

SUPPLY VOLTAGE	6v
951D101/6V	1800
951D601/6V	350
951D1021/6V	176
951D2981/6V	60

WEIGHT	
951D101	10g
951D601	10g
951D1021	10g
951D2981	10g

Note: Motor speeds may vary by (+) or (-) 12.5%

GEARED MOTOR TORQUE RATINGS AT MAX. EFFICIENCY.


	At 3V (g.cm)	At 6V (g.cm)
10:1	16	24
60:1	79	119
102:1	135	202
298:1	352	527

951D SERIES	
No load Backlash:	Max 1.5 deg.
Max Radial Load: (5mm from flange)	400gf.
Shaft Axial Load:	200gf.

NOTE: To establish Torque Rating in Nm, divide g.cm by 10,197.0


IMPORTANT NOTICE
At very low ratios the torque produced by this geared motor combination may exceed the maximum permissible torque of the gearbox. In this situation the unit must not be allowed to stall as this may damage the gears.

951D SERIES 12mm dia. SPUR SUB MINIATURE GEARED MOTOR

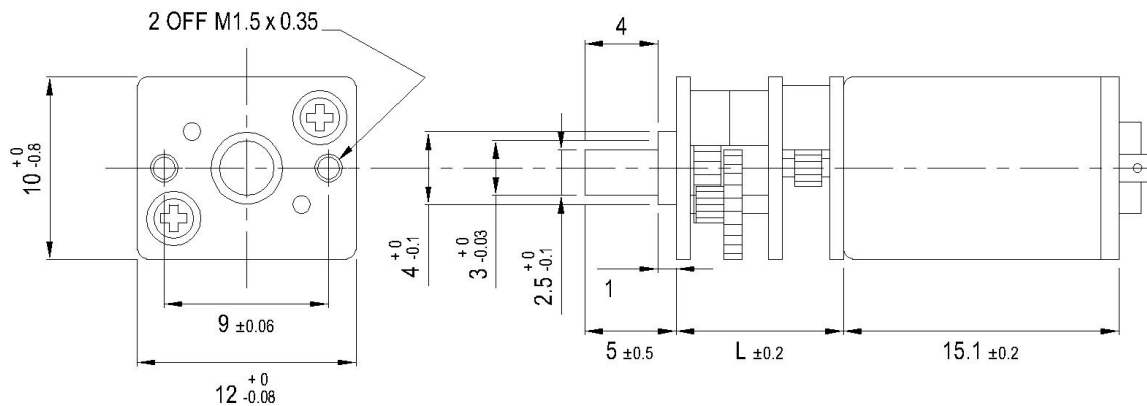

GEARBOX REF.	L (mm)
951D10:1 (10:1)	9.15
951D60:1 (60:1)	9.15
951D102:1 (102:1)	9.15
951D298:1 (298:1)	9.15

FOR ACCESSORIES TO FIT THIS SERIES GEARBOX, REFER TO 918D SERIES PAGE.



DustCap
Pt.No.951DC

Subject to minimum order quantities of 250 units, the following ratios are also available with a six week lead-time. The physical dimensions of these other gearboxes may vary from the data as illustrated above.

Details of individual gearboxes are available upon request.

19:1 29:1
76:1 134:1
197:1 235:1