


RE-385 (5 POLE)



Part No. 457RE-385 (WITH BRACKET)
 Part No. 719RE-385 (WITHOUT BRACKET)
 Part No. 725 MOTOR BRACKET (90° ONLY)

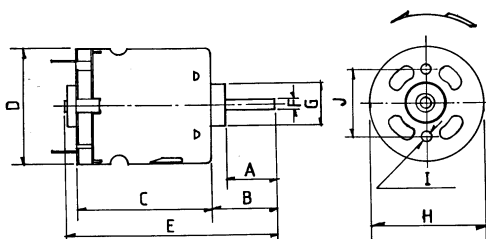

Weight 66g (approx)

DIMENSIONS	A	B	C	D	E	F	G	H	I	J
Millimeter	9.4	12.0	38.0	27.7	52.5	2.305	10.0	27.5	M2.6	16.0
Decimal Inches	0.453	0.591	1.496	1.091	2.205	0.091	0.394	1.083		0.630

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY						STALL TORQUE	
	OPERATING RANGE	NOMINAL	SPEED R.P.M.	CURRENT A	SPEED R.P.M.	CURRENT A	TORQUE oz-in	TORQUE g-cm	OUTPUT W	EFF %	oz-in	g-cm
RE-385	4.5 - 15	12v Constant	11646	0.18	9869	0.99	1.09	78.4	7.9	66.1	7.13	513.5
RE-385/24V	24	24v Constant	11748	0.09	9946	0.499		76.9	8.1	68		501.4

Stall Current RE-385 at 12v = 5.55A. RE-385/24v at 24v = 2.75A